


Canon



CORPORATE SOLUTIONS

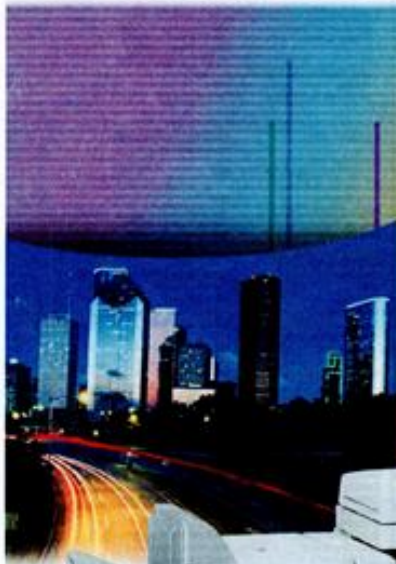

ImageRUNNER®
4570 / 3570

meap
POWERED BY



ImageRUNNER®
4570/3570


SPECIFICATIONS

MAIN UNIT

Type:	Monochrome Digital, Multifunction Imaging System
Imaging System:	Laser Dry Electrostatic Transfer
Developing System:	Dry Dual Component Developing System
Fusing System:	RAPID Fusing System™
Image Server Memory:	Standard 512MB RAM/20GB HDD
First-Copy Time:	3.9 Seconds from Platen Glass
Warm-Up Time:	5.9 Seconds from Feeder
Copy/Print Speed:	10 Seconds or Less from Sleep Mode
Max. Mail Boxes Supported:	30 Seconds from Main Power Off
Max. Copy Reservation:	Up to 45/35 ppm (Letter)
Actual Resolution:	100
Interpolated Resolution:	5 Jobs
HalfTone:	600 dpi x 600 dpi
Duplexing:	2400 dpi x 600 dpi (Print)
Magnification Reduction/Enlargement:	256 Gradients of Gray
Exposure Control:	Standard Automatic Trayless Duplexing
Standard:	25% to 400% — Platen
Optional:	25% to 200% — Feeder (in 1% increments)
Multiple Copies:	Automatic or Manual (9 Levels)
Paper Weights:	Dual 150-sheet Paper Cassettes (1,100 Sheets)
Network Interface:	Stack Bypass (50 Sheets)
Connections (H x W x D):	2,500-sheet Paper Deck (20 lb. Bond)
Dimensions (H x W x D):	Dual 150-sheet Cassette Feeding Unit (4,750 Sheets Max.)
Weight:	1 to 999
Power Requirements:	17 lb. to 20 lb. Bond (Cassette)
Power Consumption:	17 lb. to 32 lb. Bond (Stack Bypass)
Toner Yield:	30/100Base-TX (B/A/S)
	29-7/8" x 22-1/4" x 27-5/8"
	(761mm x 569mm x 700mm)
	34" x 27-1/8"
	176 lb. (81.4kg)
	120V AC, 60Hz, 10A
	1.55kW (Max.)
	24,000 @ 6% Coverage

OPTIONAL ACCESSORIES

Universal Send Kit-B1	E-mail, Fax, Super G3 Fax (Optional), User Inbox, File Server (SMB, FTP, SNA)
Sending Methods:	Max. 1,800 Destinations
Address Book Capacity:	Max. 1,000 Servers
File Format:	TIF, PDF, Optional PDF (OCR)
Sending Sizes:	Statement to 11" x 17"
Bussing Automatic Document Feeder-B1	Statement to 11" x 17"
Acceptable Originals:	50 Sheets (20 lb. Bond/Letter)
Capacity:	13 lb. to 32 lb. Bond
Max. Paper Weight:	
Cassette Feeding Unit-Y2	Dual 150-sheet Paper Cassettes (1,100 Sheets/20 lb. Bond)
Paper Capacity:	Statement to 11" x 17"
Acceptable Paper Sizes:	17 lb. to 20 lb. Bond
Acceptable Paper Weights:	

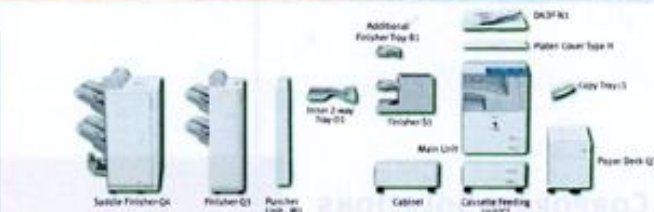

Paper Deck-Q1
Paper Deck Capacity: 2,500 Sheets (20 lb. Bond)
Paper Size: Letter
Acceptable Paper Weights: 17 lb. to 20 lb. Bond

Inner 2-Way Tray-Q1
Number of Trays: Two
Tray Capacity: 250 Sheets (Letter)
Lower Output Tray: 100 Sheets (Other Sizes)
Upper Output Tray: 50 Sheets (Other Sizes)
Copy Tray-Q1 (Optional): 150 Sheets (Letter)
Acceptable Paper Sizes: Statement to 11" x 17"
Attachable Accessories: Copy Tray-Q1

Finisher-Q1
Number of Trays: One (Second Tray Optional)
Tray Capacity: Non-Collate, Collate, Group Mode

Tray Capacity: 1,000 Sheets (Letter, Statement)
1,000 Sheets/30 Sets
Tray Capacity (with Additional Finisher Tray-B1): Non-Collate, Collate, Group Mode
300 Sheets per Tray (Letter, Statement)
300 Sheets/30 Sets per Tray (Letter)
150 Sheets/30 Sets (Legal, 11" x 17")
Corner Stapling (11" x 17", Legal, Letter, Letter-R)

Staple Position/Sizes: 50 Sheets (Letter)
Max. Stapling Capacity: 50 Sheets (Letter)
Puncher Unit-B1
Attachable Accessories: Additional Rubber Tray-B1
Copy Tray-Q1

Finisher-Q2/Saddle Finisher-Q4
Number of Trays: Two
Tray Capacity: Non-Collate, Collate, and Group Mode

Tray Capacity: 1,000 Sheets (Letter, Statement)
500 Sheets (11" x 17", Legal, Letter-R)
1,000 Sheets/30 Sets (Letter)
500 Sheets/30 Sets (11" x 17", Legal, Letter-R)
Max. Stapling Capacity: 50 Sheets (Letter)
30 Sheets (Letter-R, Legal, 11" x 17")

Saddle-Stitching (Available on Saddle Finisher-Q4 Only)
Acceptable Paper Sizes: Letter-R, Legal, 11" x 17"
Capacity/Tray: 1 to 5 Sheets/25 Sets
6 to 10 Sheets/15 Sets
13 to 15 Sheets/10 Sets
15 Sheets

Max. Stapling Capacity/Set: 15 Sheets
Folding: V-fold
Attachable Accessories: Puncher Unit-A1

Super G3 Fax Board-Q1/Q2 Multi-Line Fax Board-Q1
Applicable Line: Public Switched Telephone Network (PSTN)

Connection Lines: One
Super G3 Fax Board-Q2: Super G3 Multi-Line Fax Board-Q2

Sending/Original Sizes: Two
Statement to 11" x 17" (from Document Feeder)
Statement to 11" x 17"

Recording/Printing Sizes: Two
Statement to 11" x 17" (from Document Feeder)
Statement to 11" x 17"

Multi-PDL Printer Kit-E1
Processors: Canon Custom Processor—Shared
RAM: 112MB—Shared
Hard Disk: 20GB—Shared

PDL Support: PCL 5e, PCL 6, PostScript 3 Emulation, UFR II

Interface Connections: Standard: RS-45 (10/100Base-TX)
USB 2.0 High-Speed

Network OS: Windows® 98/Me/2000/XP
Windows NT® 4.0/Server 2003
Macintosh® OS 8.0 or Later (PPS)
Solaris® 2.6, 2.5.1 or Later
Novell® NetWare® v3.2, 4.1, 4.11, 4.2, 5, 5.1, 6, 6.5 (PPS/SPX™)

Additional Optional Accessories and Utilities
Platen Cover Type-B1
Puncher Unit-B1/NE1
Cabinet

Envelope Feeder Attachment-C1
ImageWARE Suite
Copy Tray-Q1

Barcode Label Kit-A3
Web Access Software-A3
Document Tray-Q1
Card Reader-C1
Card Sets

Universal Send PDF Enhancement Kit-B1
ImageRUNNER Security Kit-A2/B2
eCopy Suite/ShareScan CP
ImageWARE Suite
Copy Tray-Q1
Barcode Label Kit-A3
Web Access Software-A3
Voice Guidance Kit-A2
Remote Operator's Software Kit-A3
Removable HDD Kit

Canon
image*ANYWARE*

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. eCopy ShareScan is a trademark of eCopy, Inc. PostScript is a registered trademark of Adobe Systems Incorporated in the United States and/or other countries. Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh is a registered trademark of Apple Computer, Inc. Solaris is a trademark of Sun Microsystems, Inc. in the United States and other countries. Novell and NetWare are registered trademarks of Novell, Inc. in the United States and other countries. IPX/SPX is a trademark of Novell, Inc. CANON, IMAGERUNNER, and IMAP are registered trademarks, and UNIVERSAL SEND, RAPID FUSING SYSTEM, and the GENUINE logo are trademarks of Canon Inc. in the United States, and may also be registered trademarks or trademarks in other countries. REMOTE UI is a trademark of Canon U.S.A., Inc. IMAGEWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon, Inc. in certain other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners. Specifications subject to change without notice. ©2006 Canon U.S.A., Inc. All rights reserved. Some products shown with optional accessories and equipment.

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

0060W360
0406-4570/3570-60M-PCR

